



# 43" Outdoor Lithium- Battery Poster Screen

43HDLT1-6

Carrying forward the exquisite craftsmanship of this series, the appearance design is more aesthetically pleasing, featuring an outdoor tangerine stripe surface process, ultra-narrow aluminum alloy frame, and adding luster to commercial displays.

## New Feature



All-day use



Ultra-long  
battery life



1800 Nits  
Highlight  
Configuration



Comprehensive  
protection



Subwoofer



All interfaces are  
hidden

APP

Mobile APP  
Control

PnP

Plug and  
play



## Stylish appearance

Outdoor orange textured powder coating, sturdy lined aluminum shell for full protection, bottom LED light adds tech vibeg.

## IP65 Protection Rating

Dustproof, waterproof, and corrosion-resistant, suitable for various outdoor environments.



## Ultra-low power consumption

Self-developed OD10 low-power optical module. 43-inch 2000nits screen only 78W, longer battery life, lower heat, stable operation without overheating blackout.



## Ultra-long battery life

New lithium battery, offering over 11 hours of battery life



11 Hours


## Outdoor High Brightness 1800 nits

Under direct sunlight in an outdoor environment, it still maintains a high-definition and high-saturation display state.




## Battery display

A convenient power indicator design that accurately tells you how much battery power is left, achieving ultimate convenience.

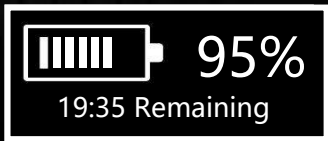

## Multifunctional backpack

A foldable and versatile backpack that is easy to push and transport. It integrates built-in battery, power level display, switches, charging ports, various interfaces, network modules, wheels and other practical functions.



## A variety of screen controls

The new design supports mobile apps, USB sticks, Ethernet and Internet cloud control, allowing you to control video content with one click.

APP



Flash drive



Ethernet



Cloud control



## Stereo speakers


The sound effect is greatly improved, not only beautiful but also waterproof.




# Equipment parameter

| Item        | Subproject                | Forty-three inches TFT-LCD                                                                                                                                     |
|-------------|---------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Screen      | Display screen            | BOE IPS High TNI 105 °C                                                                                                                                        |
|             | Resolution                | 1920x1080 (FHD)                                                                                                                                                |
|             | Display area (mm)         | 941.184 (H)x529.416 (V)                                                                                                                                        |
|             | Aspect ratio              | 9:16                                                                                                                                                           |
|             | Luminance (cd/m²)         | 1800                                                                                                                                                           |
|             | Hue                       | 16.7M                                                                                                                                                          |
|             | Visual Angle              | 178°                                                                                                                                                           |
|             | Contrast                  | 1200:1                                                                                                                                                         |
|             | Touch                     | No touch (Selectable)                                                                                                                                          |
|             | Tempered glass            | Ultra-clear glass                                                                                                                                              |
| Main board  | CPU                       | RK3566 with a maximum frequency of 1.8GHZ                                                                                                                      |
|             | GPU                       | The Mall GS2 GPU supports OpenGL ES 1.1/2.0/32 and Opencl 1.2,Vulkan 1.1                                                                                       |
|             | Internal                  | 2G is standard, 4G is optional                                                                                                                                 |
|             | Built-in storage capacity | EMMC standard 16G optional 32G, TFCard expansion                                                                                                               |
|             | network                   | Support RJ45 R/A 100 gigabit Ethernet, support Ethernet: support 2.4GHz, WIFI *support optional 5GHz), support WIFI802.11b/g/n protocol, support Bluetooth 4.2 |
|             | Operating system          | Android 11                                                                                                                                                     |
|             | Audio frequency           | MP3,WMA,WAV, APE, FLAC, AAC, OGG,M4A,3GPP and other formats                                                                                                    |
|             | Video                     | Support H.265, H.264, VP8, MAV, WMV, AVS, H.263, MPEG4 and other videos formats                                                                                |
|             | Picture                   | Various image formats such as JPG, BMP, PNG are supported                                                                                                      |
| Battery     | Battery technology        | Lithium Iron Phosphate Battery                                                                                                                                 |
|             | Charging time             | 7 hours                                                                                                                                                        |
|             | Working hours             | 11 hours<br>(When the temperature is below 0 degrees, the running time is reduced by 10% for every 5 degrees drop)                                             |
|             | Battery capacity          | 45Ah                                                                                                                                                           |
|             | Input voltage             | 25.2V                                                                                                                                                          |
|             | Energy consumption        | 1134Wh                                                                                                                                                         |
| Overall     | Appearance color          | Black, white, (Color customizable)                                                                                                                             |
|             | Body size (mm )           | 1242*586*214                                                                                                                                                   |
|             | Package size (mm)         | 1380*720*300                                                                                                                                                   |
|             | Net weight (Kg)           | 45KG                                                                                                                                                           |
|             | Gross weight (Kg)         | 50KG                                                                                                                                                           |
| Environment | Operating temperature     | -20 °C to 70 °C (when the battery is charged 0 °C to 45 °C)                                                                                                    |
|             | Storage temperature       | -30 °C to 80 °C (battery recommended long-term strage temperature -20 °C to 25 °C)                                                                             |
|             | Operating humidity        | 10% to 80%                                                                                                                                                     |
|             | Storage humidity          | 5% to 95%                                                                                                                                                      |
| Attachment  | GPS and wheel lock        | GPS choosable                                                                                                                                                  |
|             | Packaging accessories     | Remote control, manual, charger                                                                                                                                |
| Maintenance | Warranty period           | One year                                                                                                                                                       |
|             | Warranty (Battery)        | One year                                                                                                                                                       |
|             | Technical support         | Ten year                                                                                                                                                       |

# Product dimensions

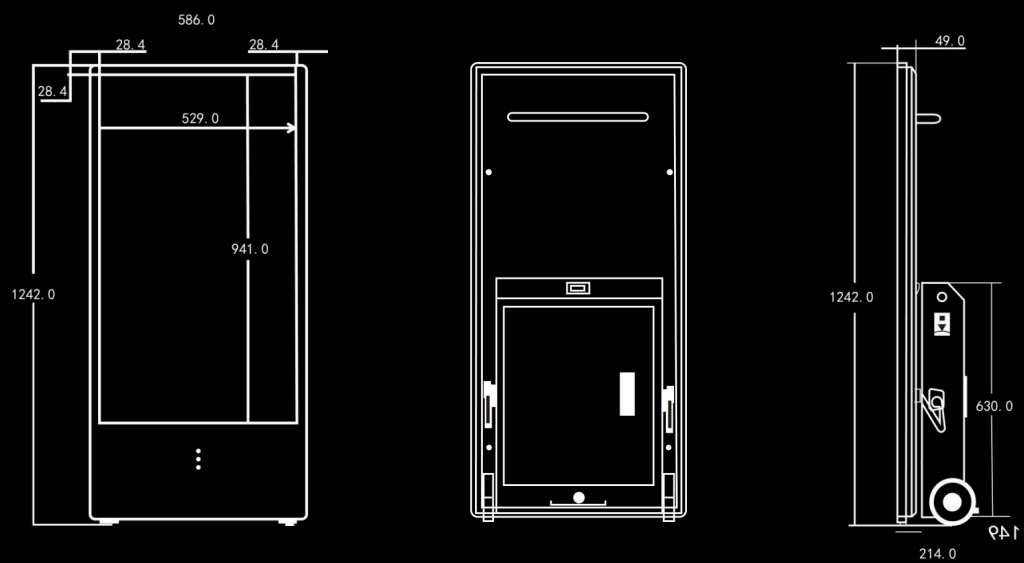

# Package dimensions

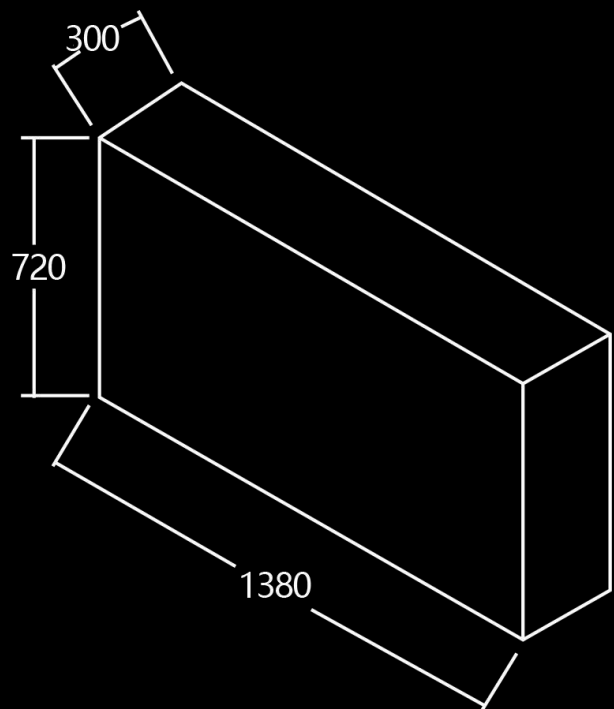



mybow.ch

RENÉ BACHMANN

Managing Director



+41 (0) 41 212 79 55



+41 (0) 79 265 70 94



rene.bachmann@mybow.ch



mybow gmbh  
Bodenhof Terrasse 22  
6005 Luzern

